


Technical Specifications

- Interlocking pipe halves with tool free assembly
- Internal diameter 55mm
- Effective installed length per segment pair 0.5m
- Material Spheroidal Graphite Cast Iron to ISO 1083/JS/400-15/S
- Material Tensile strength 400MPa, Elongation 15%
- Material wall thickness 9mm (+1 / -0.5mm)
- Assembled minimum bending diameter >4m
- Weight per installed meter 18.1 kg in air, 15.5 kg in sea water
- General tolerances in accordance with ISO 8062-CT8
- Recommend bolting with two A4 (316 grade) Stainless Steel M12 fixings comprising Hexagon Head Set Screw 50mm long; Form A Flat Washer; Split / Spring washer and Full Nut at a frequency as determined by survey and customer specification.

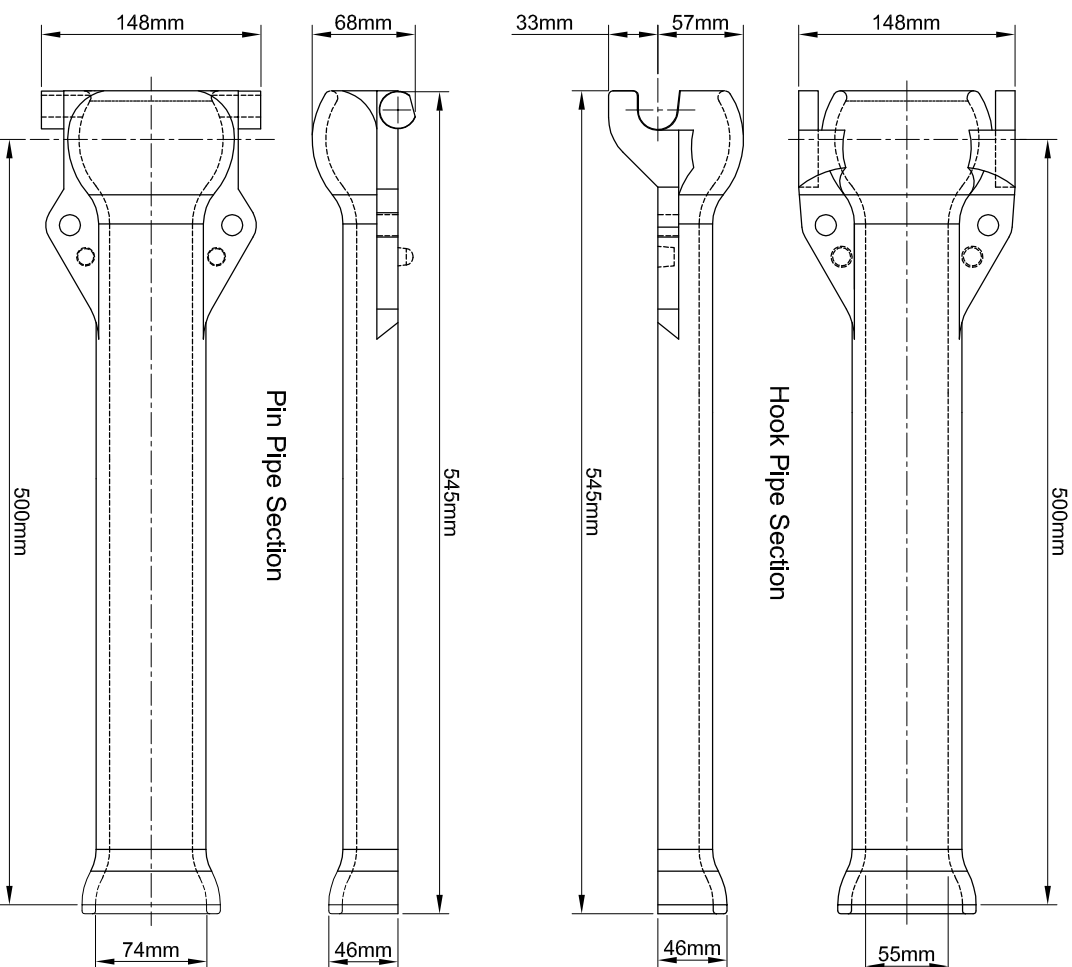

Underwater Technical Services Limited

Cedar House, 105 Carrow Road, Norwich, NR1 1HP United Kingdom
Tel: 00 44 1603 516242 Fax: 00 44 1603 516247 Email: office@utsable.com

Date: 31-05-2011 Scale: NTS Sheet Size A4

Drawn: A.S Checked: S.M App: S.M

Code: 986-999-307-001 Issue: 1d

Title: Articulated Split Pipe (55mm)